

Item No: 658T Activity Ride-On

Instructions Manual

12-36
months

WARNING
ADULT ASSEMBLY
REQUEST.



New Holland Construction is a registered trademark owned by CNH Industrial N.V., in which CNH Industrial Italia S.p.A. has a proprietary interests, and it is used herein by Ningbo Prince Toys Co., Ltd. under a license agreement entered into with CNH Industrial Italia S.p.A.

COMPONENTS LIST

1.Body 1pc	2.Steering wheel 1pc	3.Trailer 1pc
4.Seat 1pc	5.Exhaust-pipe 1pc	6.Front wheel 2pcs
7.Rear wheel cap 2pcs	8.Rear wheel 2pcs	9.Trailer wheel 2pcs
10.Front wheel cap 4pcs	11.Anti-tumble shelf 1pc	12.Trailer connector 1pc
13.J-sharped stick 1pc	14.Wheel axle 2pcs	15.Ring 6pcs
15.Washer 7pcs (1replacement piece)	16.Cotter pin 5pcs (1replacement piece)	17.Black screw 2pcs (1replacement piece)
18.Silver screw 4pcs (1replacement piece)	19.Toy 2pcs	

2

Tractor assemble

- Step 1**

1.Place the anti-tumble shelf into the rear of the tractor body.
- Step 2**

2.Insert the wheel axle through washer, rear wheel, plastic ring into the body, tighten using a cotter pin
- Step 3**

3.Assemble the two front wheels, insert the plastic ring, wheel and washer, tighten using a cotter pin.
- Step 4**

4.Place the two front wheel caps into the front wheels, and two rear wheel caps into the rear wheels.

3

- Step 5**

5.Install the J-sharped stick at the assigned location as picture.
- Step 6**

6.Loosen the bolt and nut in the steering wheel first, then place the steering wheel over the J-sharped stick, insert the bolt and tighten the nut with a screwdriver(not included)
- Step 7**

7.Assemble the seat, tighten with a black screw by a screwdriver(not included).
- Step 8**

8.Insert the exhaust pipe, be certain the exhaust pipe is completely seated.

4

Trailer assemble

- Step 1**

1.Insert the wheel axle through washer, trailer wheel, plastic ring into the trailer, tighten using a cotter pin.
- Step 2**

2.Place the two front wheel caps into the two trailer wheels.
- Step 3**

3.Assemble the trailer connector with three sliver screws by a screwdriver(not included)
- Step 4**

4.Insert the two toys into the holes of the trailer.

5

- Step 5**


5.Open the lock and connect the trailer with tractor.

Battery change

- Turn over the tractor body, and find the battery house. Loosen the screw with a screwdriver(not included). Put 2 AA batteris in the battery house, then tight the screw with a screwdriver(not included).

6

Function

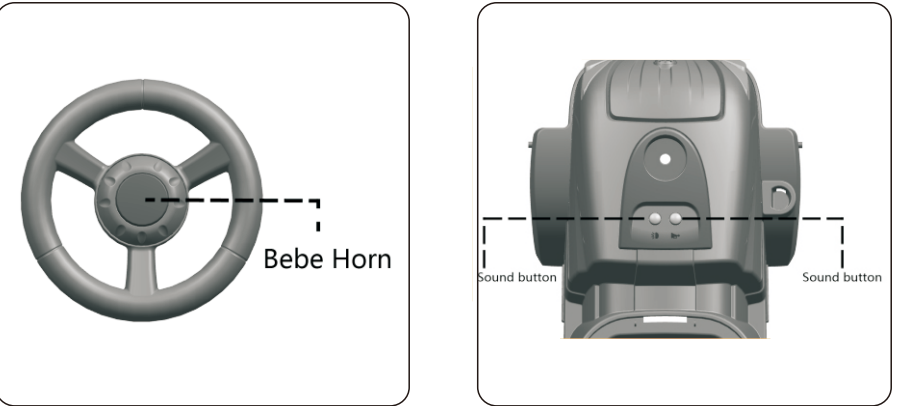

7

Warning:

- 1-Ride-on car is designed for children up 12-36 months old. Ride's weight must not exceed 25 kgs. as there is insufficient strength to support overweight.
- 2-Product is designed to seat 1 child as a time to avoid injuries.
- 3-Parental guidance and supervision are strongly advised to ensure safe riding.
- 4-Adult assembly and installation of all parts are required to ensure safety.
- 5-Batteries to be handled by adults.
- 6-Take care of riding and avoid going near streets, crossroads, all traffic areas, swimming pools, and stairs.
- 7-Without regular check of the product, it will cause overturn or fall
- 8-Check to see occasionally that the nut and bolt on the steering wheel is tight and secure.
- 9-Dangers may present if the product is not correctly assembled.
- 10-Shoes must be worn in use.
- 11-The trailer is not suitable for transport children, and the load weight not exceed 1.5kgs.

Battery Handling:

- 1-Battery must be handled by adults only.
- 2-Always remove exhausted batteries.
- 3-Use AA size batteries only.
- 4-Alkaline batteries are recommended.
- 5-Always remove batteries when the unit is not going to be used for an extended period of time.
- 6-When replacing new batteries, always replace all batteries.
- 7-Do not mix old and new batteries.
- 8-Do not mix Alkaline, Standard (Carbon-Zinc), or Rechargeable (Nickel-Cadmium) batteries.
- 9-Do not dispose of batteries in fire, batteries may explode or leak.
- 10-Non-rechargeable batteries are not to be recharged
- 11-Rechargeable batteries are to be removed from the toy before being charged
- 12-Rechargeable batteries are only to be charged under adult supervision
- 13-Batteries are to be inserted with the correct polarity
- 14-The supply terminals are not to be shortcircuited

8