

MODEL NO.

EN

**HL700-3**

# TRICYCLE OWNER'S MANUAL

Please read entire manual before starting assembly.  
Keep this manual along with your purchase receipt  
for future reference.



**WARNING:**  
CHOKING HAZARD-Small parts.  
Not for children under 2 yrs.



**WARNING:**  
Toy must be assembled by adult before use.



**CAUTION**  
Screws contain potentially  
hazardous sharp points or  
sharp edges. Adult assembly  
required.



**WARNING:**  
To reduce the risk of injury, adult supervision  
is required. Never use on road ways, near  
motor vehicles, on or near steep inclines or  
steps, swimming pools or other bodies of  
water. AfNays wear shoes, and never allow  
more than one rider.

Contents, colors and decorations may vary from those shown.

## IMPORTANT

You must charge your battery for 12 hours before you use your vehicle for the first time.

Remember to...

- ✓ Charge the battery immediately after each use.
- ✓ Charge the battery at least once a month during storage, even if the vehicle has not been used.

The battery will be permanently damaged and void your warranty if you fail to follow the instructions. Please refer to the Battery Care Section in this manual for more information.

## Important Information

- Your new vehicle requires adult assembly. Please set aside at least 30 minutes for assembly.
- You must charge your battery for 12 hours before you use your vehicle for the first time. We recommend that you start charging your battery before beginning assembly. Please see Battery charging beginning on page 6 for detailed instructions.
- Read this manual carefully for important safety information and operating instructions before using your vehicle. Keep these instructions for future reference as they contain important information.
- Do not operate on grass.
- This vehicle is designed for use on: concrete, asphalt or other hard surfaces; on generally level terrain; by children ages 2 and up.
- Instruct the children on operation and safe driving rules before they take their first drive
  - always sit in the seat.
  - always wear shoes.
  - only one (1) rider at a time
  - Do not place hands, feet or any part of the body, clothing or other articles near moving parts while the vehicle is in operation.
  - Do not allow other children near the car when driving
- Use this vehicle ONLY outdoors. Most interior flooring can be damaged by riding this vehicle indoors.
- To prevent damaging the motors and gears, do not tow anything behind the vehicle or overload it. Do not exceed the maximum weight capacity of 55 lbs. (25 kg) .
- Warning. Protective equipment should be worn. Not to be used in traffic.
- The toy should be used with caution since skill is required to avoid falls or collisions causing Injury to the user or third parties.

# Warning

## To Prevent Serious Injuries

- This product is intended for use by children ages 2 and up, and is not intended for children under 2 years of age due to lack of ability to operate safely.
- Maximum weight 55 lbs. (25 kg). Maximum 1 rider at a time.
- Do not leave children unattended. Adult supervision required.
- This package contains small parts. Keep away from the children until assembled.
- Read manual for detailed safety information prior to use.
- Inspect product at regular intervals for wear or loose hardware and tighten as required. Remove from service if any abnormal conditions such as cracks or breaks exist.
- Check all coverings regularly to make sure they are in place.
- Batteries can fall out and injure a child if the vehicle tips over. Always use the battery strip or cover.
- When the temperature falls below 0°F (-18°C), outdoor use of this product is not recommended.
- In extreme cold, plastic materials might lose resilience and may become brittle and crack upon impact. Store in a warmer and protected place.
- Do not operate the vehicle outdoors if it is raining. Keep it in a dry area when not in use.
- Disconnect the battery power supply when the vehicle is not in use to prevent the children driving the car without adult supervision.
- Always make sure the seat is securely attached.
- The charger and battery are not toys and must be regularly examined for damage to the cord, plug, enclosure and other parts.
- Always make sure the seat is securely attached.
- In the event of damage, the damaged or worn part must not be used until replaced.
- Never modify the electrical system. Use of the wrong type battery or charger could cause a fire or explosion.
  - The battery compartment and area under seat are not storage areas. Storing other articles may create a fire hazard. Do not store any articles in or near motor compartment.

### • **ADULT SUPERVISION REQUIRED. MAKE SURE CHILDREN KNOW AND FOLLOW THESE RULES FOR SAFE DRIVING.**

- Restrict children to safe riding areas:
  - Away from swimming pools and other bodies of water to prevent drowning.
  - Level ground to prevent tipovers and unintended downhill motion.
  - Away from steps, hills, driveways, roads and alleys.
- Teach and learn the safety first:

Although most children can master the physical driving skills to control the vehicles, they do not have the mature judgment skills. Never let a child drive at any time without adult supervision, and take the time to carefully evaluate child's skill levels and abilities to operate the vehicle safely. Children can not always recognize the hazards even after instruction. So teach appropriate safety rules before allowing any child to operate vehicle, and remember that THERE IS NO SAFE SUBSTITUTE FOR DIRECT ADULT SUPERVISION.

### • **Riding rules:**

- Always sit on the seat and wear shoes.
- Maximum one rider at a time.
- Do not operate in the street or near moving vehicles.
- Do not operate near bodies of water, obstructions or drop-offs.
- Do not operate on sand, dirt or gravel.
- Do not operate in the dark. Unexpected obstacles could cause an accident.
- Do not operate on inclines or steep slopes.
- Do not operate near flammable vapors (e.g. gasoline, paint thinner, acetone, liquid wax etc. Using the vehicle near flammable liquids can or vapors could cause an explosion or fire.
- Do not place anything near moving parts such as motors, gears or wheels. Rotating parts can snag hair, fingers, etc., which may cause serious injury.

# Battery Warning

4

## ELECTRICAL HAZARD



### WARNING

Battery can fall out and injure a child if vehicle tips over. Always use battery cover.

#### PREVENT FIRE

- Never modify the electrical system. Alterations could cause a fire resulting in serious injury and could also ruin the
- Use of the wrong type battery or charger could cause a fire or explosion resulting in serious injury.
- The battery must be handled by adults only. The battery is heavy and contains sulfuric acid (electrolyte). Dropping the battery could result in serious injury.
- Never allow children to charge the battery.
- Battery charging must be done by adults only. A child could be injured by the electricity involved in charging the battery.
- Never lift or carry the battery by the wires or connector. This can damage the battery and possibly cause a fire resulting in serious injury. Lift and carry the battery by the case only.
- Read the safety instructions on the battery.
- Examine the battery, charger and their connectors for excessive wear or damage each time you charge the battery. If damage or excessive wear is detected, do not use the charger or the battery until you have replaced the worn or damaged part.



### CAUTION

Only use the charger in dry locations

## About Thermal Fuses

Your 6 volt battery is equipped with a built-in thermal fuse. The thermal fuse is a self-resetting safety device which automatically trips and shuts down operation of the vehicle if the vehicle is over loaded or the driving conditions too severe. Once a fuse has tripped, it will automatically reset itself after approximately 10 seconds and allow the vehicle to resume normal operations. To avoid repeated automatic shut downs, do not overload the vehicle by exceeding the 55 lbs. (25 kg) maximum weight capacity or by towing anything behind the vehicle. steep slopes or running into fixed objects, which can cause the wheels to stop spinning while power is still being supplied to the motors.

## Important Notes


- Your new battery must be charged for at least 12 hours before you use it in your vehicle for the first time.
- You do not need to remove the battery from your vehicle to recharge it.
- The battery must be upright while charging.
- The charger is not a toy.
- Do not short circuit the battery.
- We recommend that you start charging your battery before beginning assembly of your new vehicle.
- Before charging the battery, examine the battery case
- If damage is detected, do not charge the battery or use it in your vehicle. Battery acid is very corrosive and can cause severe damage to surfaces it contacts.
- Do not charge the battery on a surface which could be damaged by the acid contained inside the battery. Take precautions to protect the surface on which you charge your battery.
- If your battery is old and will not accept a charge, do not leave it in the vehicle. Always remove a dead battery from the vehicle.
- Non-rechargeable batteries are not to be recharged.
- Rechargeable batteries are only to be charged under adult supervision.
- Only batteries of the same or equivalent type as recommended are to be used.
- Batteries are to be inserted with the correct polarity.
- Exhausted batteries are to be removed from the toy
- The supply terminals are not to be short-circuited.

# Battery Charging



## CAUTION

- Non-rechargeable batteries are not to be recharged.
- Make sure the charger connector is matching with the battery connector.
- Make sure the brand, voltage and frequency of the charger are in accordance with the wall outlet.
- Batteries are to be inserted with the correct polarity.
- The supply terminals are not to be short circuited.

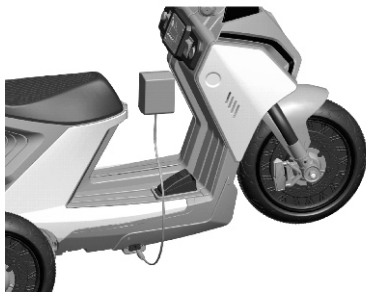


5

### Charge the Battery

**The first charge will take about 12 hours.**

1. Insert the charger connector into the charger port (located on the pedal of nearby).
2. Plug the charger into a standard 120V OR 230V wall outlet. Note: The charger may feel warm during charging, this is normal and not a cause for concern.
3. After charging is complete (at least 8-10 hours, but not more than 24 hours, with the first charge taking about 12 hours) unplug the charger from the wall outlet and unplug the battery connector from the charger port.

- Plug the battery connector into the charger port.
- Plug the charger into a standard wall outlet. The charger may feel warm during charging.  
Only use the 6 / 12 volt charger to charge your 6 / 12 volt battery  
Before first-time use, charge the battery for at least 12 hours. Never charge the battery longer than 24 hours.  
Before first-time use, charge the battery for at least 12 hours. Never charge the battery longer than 24 hours.
- Do not charge or store battery upside down. Charging produces explosive gases. Charge away from flames, sparks and lit cigarettes. Charge in a well ventilated area.
- Once the battery is charged, disconnect the battery connector from the charger connector. Unplug the charger from the wall outlet. The battery is now ready to be installed in your vehicle. Please see the following Battery Installation Section for detailed instructions on installing your vehicle:



### Battery Replacement

1. Lift the seat out
2. Disconnect the battery connectors
3. Remove 2 screws on the sides of the battery
4. Take out the battery from the battery compartment.

## Battery Care and Disposal

### Care

- If a battery leak develops, avoid contact with the leaking acid and place the damaged battery in a plastics sealed bag.
- If acid comes in contact with skin or eyes, flush with cool water for at least 15 minutes and call a physician immediately.
- If acid internally ingested, give water, milk of magnesia or egg whites immediately. Never give emetics or induce vomiting. Call a physician immediately.
- Charge a new battery for at least 12 hours before first use.
- Never charge the battery longer than 24 hours.
- Overcharging or undercharging the battery may shorten battery life and decrease vehicle running time.
- After the first charge, recharge the battery for at least 8-10 hours after each use. Never charge the battery longer than 24 hours. Charge the battery after each use, regardless of how long the vehicle was used.
- The battery must be upright while charging.
- Do not allow the battery to run down completely before charging.
- Charge the battery before storing the vehicle.
- Charge the battery at least once per month, even if the vehicle has not been used.
- Leaving the battery in a discharged condition will ruin it.
- If the vehicle will be stored for more than two months, be sure to disconnect the motor harness from the battery.
- Do not store the battery in temperatures above 17 °F or below -10 °F.
- Prevent the battery from moving freely inside the battery compartment. Make sure all screws for battery trips tighten.
- Examine the battery, charger and its connector for excessive wear or damage each time you charge the battery. If damage is detected, do not use the charger or the battery until you have replaced the worn or damaged part.
- Remember to remove an exhausted battery from the vehicle.
- Battery leakage and corrosion can damage the vehicle.

### Disposal



- Your battery is a sealed lead-acid battery. It must be recycled or disposed of it in an environmentalaly sound manner.
- Never dispose your battery in the regular, household trash. The incineration, landfilling or mixing of sealed lead-add batteries with household trash is prohibited by law in most areas.
- Always remove exhausted batteries from your toy.
- Bispose of dead batteries properly. Never burn or bury them.
- Do not dispose of a lead-acid battery in a fire. The battery may explode or leak.

TO PROLONG BATTERY LIFE, YOU MUST RECHARGE THE BATTERY AFTER EACH USE. YOU MUST ALSO CHARGE YOUR BATTERY IF IT HAS NOT BEEN USED FOR 30 DAYS OR MORE.

# Parts List

- Please identify all parts before assembly and save all packaging material until assembly is completed to ensure that no parts are discarded.
- Metal parts have been coated with lubricant for protection during shipment. Wipe all metal parts with a paper towel to remove any excess lubricant.


7



Main body x 1



Handbar x1



Windshield x1



Front Wheel x1



Front Wheel x1



Rear AxleX1



Front Fork x1



Front Fork Decoration x2



Socket Tool x2



Washer X 4  
(8\*22\*1.3mm)



Nut X4(M8)



ScrewX8(4X16mm)



Bolt x 1(M5 X30)



Nut X1 (M5)

MANUAL

Manual x1




Charger x1

# Assembly

8


Tips 1.

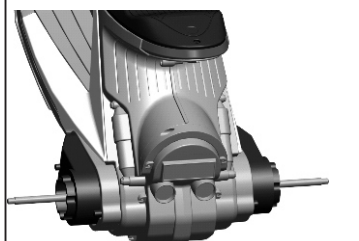

## 1. Rear Axle Assembly

Insert the rear axle into the rear motors as picture shown.


Tips 2.

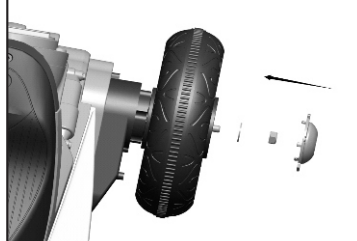

## 2. Rear Wheel Assembly

Assemble all the parts in sequence as the picture shown, insert the wheel in the axle, then Washer, fasten the nuts with the socket tools for two sides at the same time. Press the cover to the right slot until hearing crack.


Tips 3.

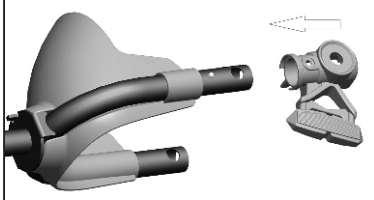

## 3. Front Fork Decoration Assembly

Put the front fork decoration to the fork as the picture shown on the right, make all the holes in one line, same process for the left side.


Tips 4.

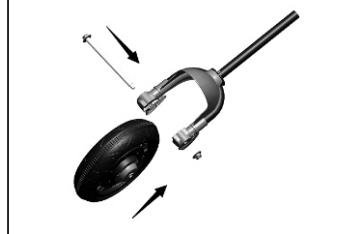

## 4. Front Wheel Assembly


Take off one nut from the front axle, assembly all the parts as picture shown, and fasten it with one nut.

# Assembly

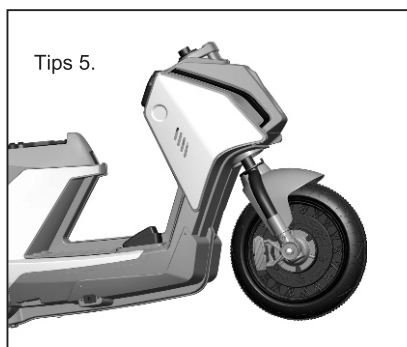


## 5. Front Fork Assembly

Insert the fork to the main body as picture shown.

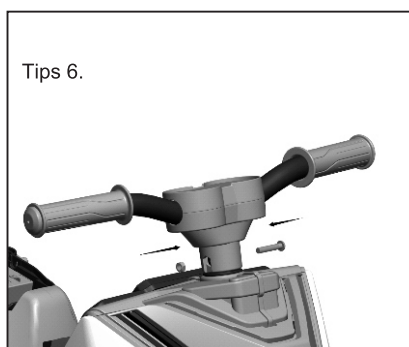


## 6. Handbar Assembly

Take out the handbar, place it onto the turning shaft and fasten it with bolt and nut(M5).

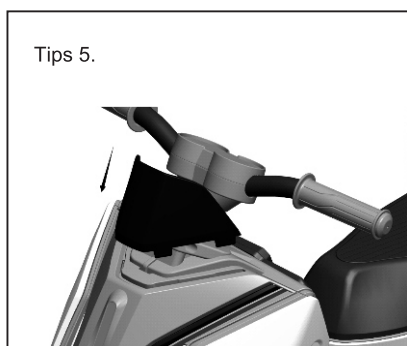

## 6. Windshield Assembly

Insert the windshield to the main body as picture shown.

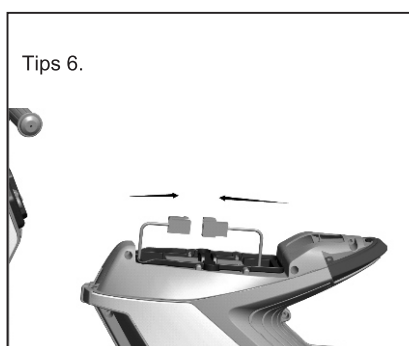

## 8. Battery Assembly

Plug the connector to the terminal as picture shown.



## 6. Seat Assembly

Press the seat to the slot of mainbody, fasten it with 1 screw as picture shown.

## Operating your Vehicle

### Power switch

Switch button ON and OFF

### Forward

Press the button in upward position and press the accelerator slowly.

### Reverse


Press the button in backward position and press the accelerator slowly.

### Low speed

Vehicle has been pre-set to operate at low speed (1.5 mph). Once your child has mastered safe driving skills and understands the Safe Driving Rules, can try with high speed.

### High speed

Vehicle to be driven at the higher speed (2.5 mph max) . Make sure your child can safely steer and operate the vehicle and knows the rules for safe driving.

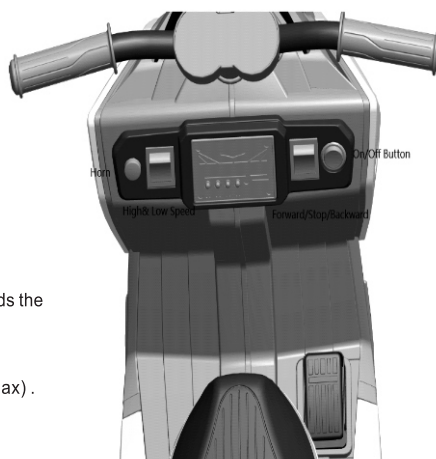

### Stop

Vehicle will automatically stop after the accelerator is released.

### Sound effect

Press the buttons on the Mp3 board, each button will make a different sound effect.

### Safety device

AUTO POWER OFF. If the motor is overloaded for any reason, including improper usage, an electrical circuit breaker will automatically cut off the power, then resume after the parts have cooled.

### Maintenance

- Clean with a dry, soft cloth only. Do not wash with water or corrosive material.
- Store vehicle in a dry area when not in use, since moisture could cause the metal components and electrical parts to corrode.
- Remember to charge the battery monthly while the vehicle is not in regular use.
- Check and tighten all screws and coverings regularly.
- Check all plastic parts for cracks. Replace as necessary.

# Troubleshooting

11

| Problem                              | Possible Cause           | Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Car cannot move                      | Circuit breaker tripped  | Circuit breaker may "trip" and stop the vehicle if it is overloaded at the driving conditions too severe. The breaker will automatically reset after approximately 10 seconds, and the vehicle will operate normally. To avoid repeated automatic shut downs, do not overload the vehicle by exceeding the weight limited of 25kg(55lbs). Or by towing anything behind the vehicle. Do not drive up hills or run into fixed objects, which can cause the wheels to stop spinning while power is still being supplied to the motors.                                                            |
|                                      | Loose wire or connectors | Check all wire and connectors. Make sure that the motor connector is plugged in tightly to the battery, and that there are no loose wires around the motor.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                      | Dead battery             | An old or improperly cared battery may be dead. If you are unsure whether it is dead or not, you can have it tested at your service Center.                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                      | Undercharged battery     | A new battery should have been charged for at least 12 hours before using the vehicle for the first time. After that, it must be recharged for at least 8-10 hours after each use. Never charge longer than 24 hours. Check all connectors, make sure the charger is plugged into the power flow to the outlet is on.                                                                                                                                                                                                                                                                          |
|                                      | Charger is not working   | You must have a volt meter in order to tell whether the charger is working or not. If you think there maybe a problem with the charger, take it to the Service Center where they will test it for you.                                                                                                                                                                                                                                                                                                                                                                                         |
|                                      | Damaged switch           | When exposed to water or moisture, switch can become corroded, or can jam due to loose dirt, sand, or gravel. Contact your service Center for diagnosis and repair.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Car was running but suddenly stopped | Loose wire or connectors | Check all wire and connectors. Make sure that the motor connector is plugged in tightly to the battery, and that there are no loose wires around the motor.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                      | Circuit breaker tripped  | Circuit breaker may "trip" and stop the vehicle if it is overloaded at the driving conditions too severe. The breaker will automatically reset after approximately 10 seconds, and the vehicle will operate normally. To avoid repeated automatic shut downs, do not overload the vehicle by exceeding the weight limited of 25kg(55lbs). Or by towing anything behind the vehicle. Do not drive up hills or run into fixed objects, which can cause the wheels to stop spinning while power is still being supplied to the motors. If breaker continually trips, contact your service Center. |


## Troubleshooting

| Problem                                           | Possible Cause                            | Solution                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short operating time(less than 1 hour per charge) | Undercharged battery                      | A new battery should have been charged for at least 12 hours before using the vehicle for the first time. After that, it must be recharged for at least 8-10 hours after each use. Never charge longer than 24 hours. Check all connectors, make sure the charger is plugged into the power flow to the outlet is on. |
|                                                   | Overcharged battery                       | Never charge battery longer than 24 hours. If you think the battery maybe damage due to overcharging, contact your Service Center for testing.                                                                                                                                                                        |
|                                                   | Old battery will not accept a full charge | Even with proper care, a rechargeable battery does not last forever. Average battery life is 1-3 years depending on vehicle use and use conditions. Replace the battery with a new rechargeable battery. Do not substitute parts. To get a replacement battery, please contact your Service Cneter.                   |
| Vehicle is sluggish                               | Undercharged battery                      | A new battery should have been charged for at least 12 hours before using the vehicle for the first time. After that, it must be recharged for at least 8-10 hours after each use. Never charge longer than 24 hours. Check all connectors, make sure the charger is plugged into the power flow to the outlet is on. |
|                                                   | Battery needs charging                    | Be sure to charge the battery after each use.                                                                                                                                                                                                                                                                         |
|                                                   | Old battery will not accept a full charge | Even with proper care, a rechargeable battery does not last forever. Average battery life is 1-3 years depending on vehicle use and use conditions. Replace the battery with a new rechargeable battery. Do not substitute parts. To get a replacement battery, please contact your Service Cneter.                   |
|                                                   | Vehicle is overloaded                     | Allow no more than 1 rider at a time, follow the 25kg(55lbs)weight capacity and donot tow anything behind the vehicle.                                                                                                                                                                                                |
|                                                   | Driving conditions are too stressful      | Use only on a generally lever ground.                                                                                                                                                                                                                                                                                 |

# Troubleshooting

| Problem                                                                | Possible Cause                                                 | Solution                                                                                                                 |
|------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Intermittent vehicle operation                                         | Loose wire or connectors                                       | Check all wire around the motor and all connectors to make sure they are tight.                                          |
|                                                                        | Motor or electrical switch damage                              | Contact your Service Center for diagnosis and repair.                                                                    |
| When the accelerator is pressed, the vehicle won't run without a push. | Loose wire or connectors                                       | Check all wire around the motor and all connectors to make sure they are tight.                                          |
|                                                                        | "Dead Spot" on motor                                           | Contact your Service Center for diagnosis and repair.                                                                    |
| Motor gear box makes a loud grinding or clacking noise                 | Broken gears                                                   | Contact your Service Center for diagnosis and repair.                                                                    |
| Charger get warm during use.                                           | This is normal and should not be concern.                      | No action required.                                                                                                      |
| Battery makes gurgling or sizzling noise while charging.               | Some noise and swelling is normal and should not be a concern. | No action required. If the battery does not make noise while charging. It does not mean it isn't accepting the charging. |

## Parts Diagram

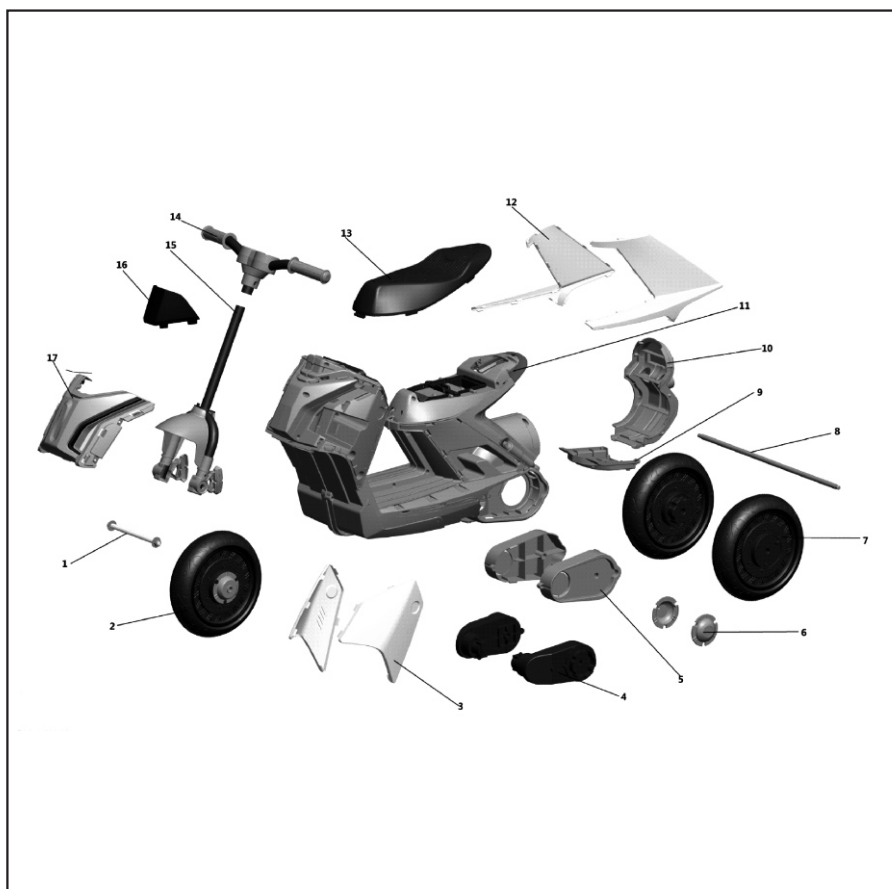

| No. Part                  | Quantity | No. Part                  | Quantity | No. Part      | Quantity |
|---------------------------|----------|---------------------------|----------|---------------|----------|
| 1.Front Wheel Axle        | 1pc      | 7.Rear Wheel              | 2 pcs    | 13.Seat       | 1pc      |
| 2.Front Wheel             | 1 pc     | 8.Rear axle               | 1pc      | 14.Handbar    | 1pc      |
| 3.Front Decoration Parts  | 2pcs     | 9.Plastic part under body | 1pc      | 15.Front Fork | 1pc      |
| 4.Rear Drive Assembly     | 2pcs     | 10.Rear body cover        | 1pc      | 16.Windshield | 1 pc     |
| 5.Motor cover             | 2pcs     | 11.Rear lights cover      | 1pc      | 17.Head Part  | 1pc      |
| 6.Motor cover Decorations | 2pcs     | 12.Rear Decoration Parts  | 2pcs     |               |          |