

OWNER'S MANUAL



Model:ATV002;FR125ATV-SP

INTRODUCTION

Thank you for purchasing ATV002/FR125ATV-SP.

This manual will provide you with a good basic understanding of the features and operation of your ATV.

This manual includes important safety information. It provides information about special techniques and skills necessary to ride your ATV. It also includes basic maintenance and inspection procedures.

Please read this manual carefully, it will maximize the performance and lifetime of your ATV. IMPORTANT

MANUAL

INFORMATION

FAILURE TO FOLLOW THE WARNINGS AND CAUTIONS IN THIS MANUAL CAN RESULT IN SERIOUS INJURY OR DEATH.

The safety alert symbol means attention!



Failure to follow warning instructions could result in severe injury or death to the machine operator, a bystander, or others who inspect or repair the machine.

CAUTION: A caution shows special precautions that must be taken to avoid damage to the machine.

All Terrain Vehicle Safe Riding.....2

Important Notice To Parents.....2

Safe Riding Rules.....3

Protective Clothing.....3

Refitting.....3

Loading.....3

Accessories.....4

Serial Number Location.....4

Fuel And Oil Recommendations.....5

Location Of Parts.....5

Controls.....7

Left Handlebar.....7

Choke Lever.....8

Equipment And Adjustments.....9

Remote Engine Stop Switch.....10

Break-in.....11

Maximum Throttle Opening Recommendation.....11

Very The Engine Speed.....11

Avoid Constant Low Speed.....11

Observe Your Initial And Most Critical Service.....11

Inspections Before Riding.....11

Riding Tips.....12

Starting The Engine.....13

Starting Off.....13

Braking.....14

Turning.....14

Turning At Higher Speeds.....14

Skidding Or Sliding.....14

Operation On Hills.....15

Riding Through Water.....16

Stopping The Engine.....17

Parking The Vehicle17

Instructing Young Riders.....17

Proper Clothing And Protective Wear.....17

Familiarization With The Vehicle.....18

Starting Off And Stopping.....18

Turning.....19

Putting It All Together.....19

Inspection And Maintenance.....20

Maintenance schedule20

Periodic Maintenance Chart.....21

Seat Removal.....22

Air Cleaner.....22

Spark Plug.....22

Idle Speed Adjustment.....23

Throttle Cable Adjustment.....24

Fuel Hose.....24

Engine Oil.....24

Brake.....24

Recoil Starter Engagement Adjustment.....25

Tires26

Tire Pressure.....26

Tire Replacement.....27

Tubeless Tire Repair.....27

Drive chain.....27

Drive Chain Cleaning and Oiling.....28

Front And Rear Wheel Removal.....28

General Lubrication 2 9

Troubleshooting.....29

Fuel System Check.....29

Ignition System Check.....30

Transportation 30

Starting After Transport.....30

Cleaning Procedure31

Preparation For Cleaning.....31

Washing Your ATV.....31

Inspection After Cleaning.....32

Storage Procedure.....32

Vehicle.....32

Fuel.....32

Engine.....32

Tire.....32

External.....32

Procedure For Returning To Service.....33

Circuit Diagram.....33

Specifications.....34-36

PREFACE

This manual describes the basic operation and maintenance for the All Terrain Vehicle, which should be read carefully before operation. Proper operation and maintenance will minimize problems with the All Terrain Vehicle and keep it in optimal performance. Your dealer will provide you with technical and after sales service.

IMPORTANT NOTICE

Operation and passenger

This All Terrain Vehicle is designed to carry only the operator. Never exceed the maximum weight capacity as specified in the manual.

Off-road use

This All Terrain Vehicle is designed to be used for off-road use only. Do not ride on public roads.



Indicates a strong possibility of severe personal injury or death if instructions are not followed

Caution

Indicates possibility of personal injury or equipment damage if instructions are not followed

Note Gives helpful information

This manual should be considered as a permanent part of the All Terrain Vehicle and should remain with the All Terrain Vehicle when resold.



ALL TERRAIN VEHICLE SAFE RIDING

All Terrain Vehicle riding requires special effort on your part to ensure your safety. Know the requirements below before you ride.

IMPORTANT NOTICE TO PARENTS



Even though the ATV has four wheels it can tip over in any direction. Improper turning on hills can lead to vehicle tip over. Learn proper riding techniques and avoid riding situations which can lead to vehicle tip over.

The ATV and other all terrain vehicles (ATVs) have unique handling characteristics. ATV's handle

differently than motorcycles. Although ATV's have four wheels, they handle differently than automobiles too. ATV's require special riding techniques suited to their handling

characteristics.,

so be sure that all riders of the ATV practice and master the riding techniques described in this

owner's manual.

SAFE RIDING RULES

1. No riders under the age of 10 years are permitted to ride the vehicle.
2. Both parents and their children must fully understand everything in the Owner's Manual before riding.
3. This vehicle is for one OPERATOR ONLY.
4. For OFF-ROAD USE ONLY. This vehicle is designed to be operated only on level off-road surfaces, free of obstacles.
5. It is illegal to ride this vehicle on public roads or highways. If it is necessary to cross a public road, please get off this vehicle and push it across.
6. Do not operate this vehicle while under the influence of alcohol or drugs. This can impair judgment and result in serious injury or even death.
7. Keep a safe distance between your vehicle and other off-road vehicle(s).
8. Never ride this vehicle unless it had been properly adjusted and maintained.
9. Do not allow your child to ride without supervision.
10. Never run the engine in a closed area. The exhaust gas contains poisonous carbon monoxide gas (CO).
11. Don't touch any part of the engine and muffler during and even after riding, because it is very hot.

*Recommends taking a safety course before riding your vehicle.

PROTECTIVE CLOTHING

1. Protective wear such as a helmet with protective mask, dustproof goggles, boots and gloves should be worn during operation for personal safety. ALWAYS wear a helmet.
2. Loose clothes are not suitable for All Terrain Vehicle operation as they may get caught on the operating levers, kick lever, footrests or wheels, resulting in personal injury.
3. The exhaust system becomes hot during operation, and it remains hot for a while even after stopping the engine. Be careful not to touch the exhaust system while it is hot. Wear clothing that fully covers your legs.



Refitting of the All Terrain Vehicle, or removal of original parts, may make the vehicle unsafe

or illegal. Obey all national and local equipment regulations.

LOADING

Caution: The incorrect loading could hurt the performance and reliability. Max Load limit: 75KG (165lbs.)

ACCESSORIES

Genuine accessories by our company have

been specifically designed and tested on the all terrain vehicle. Because our company won't test accessories manufactured by other companies, you are personally responsible for selection, installation, and use of them. Always follow the guidelines below:

1. Carefully inspect the accessory to make sure that it does not obscure any lights or reflectors, reduce ground clearance, and banking angle, or limit suspension travel, steering travel or control operation.
2. Accessories may increase the time that hands or feet operate controls, resulting in decreased reaction time in an emergency.
3. Do not add electrical equipment that will exceed the vehicle's electrical system capacity.
4. Do not add a cooling device to the engine.

SERIAL NUMBER LOCATION

The frame and / or engine serial numbers are used to title the vehicle. They are used to assist your dealer when ordering parts or referring to service information.



THE FRAME NUMBER

1. The frame number is stamped on the front frame as show in the photograph
 2. The engine number is stamped on the left side of the engine as picture showed.
- Please write down the serial number for your future reference

Engine Number

Frame No.:	
Engine No.:	

FUEL AND OIL RECOMMENDATIONS FUEL


Gasoline used should be graded 91 octane or higher. An unleaded type of gasoline is recommended. If engine pinging is experienced, substitute for another brand.

ENGINE OIL

Use a good quality SAE 10W/40 multi grade motor oil

**LOCATION OF PARTS
FOR ATV**



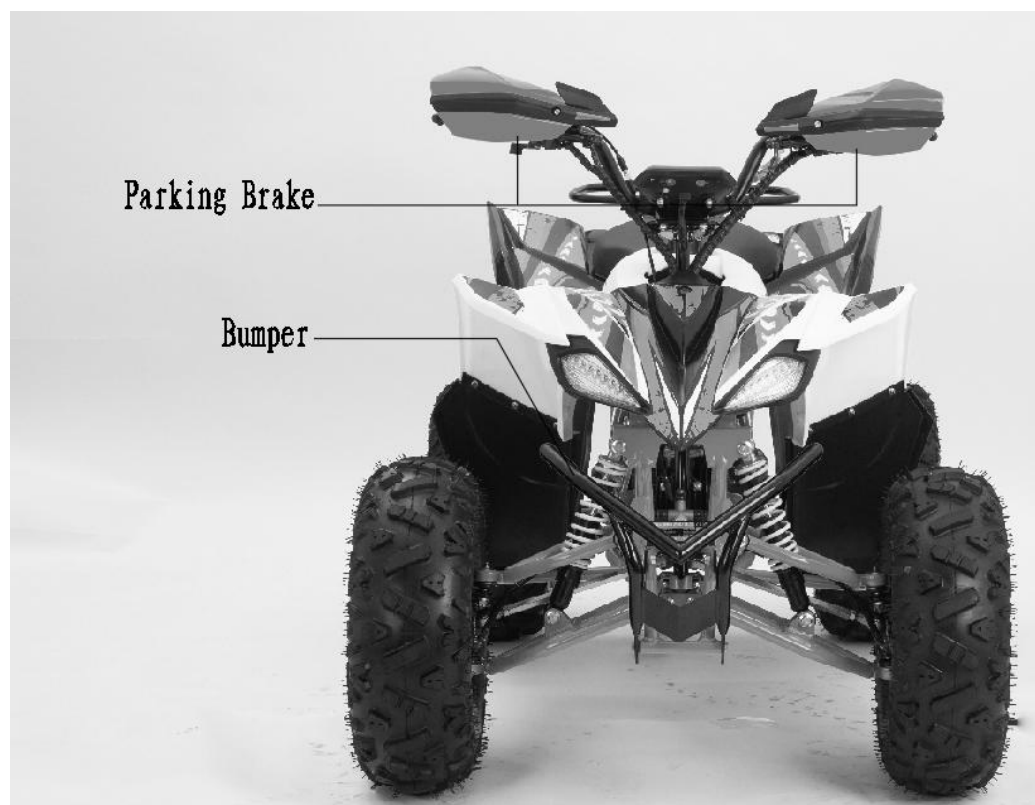

WARNING



Warning

Improper ATV use can result in SEVERE INJURY or DEATH.



ALWAYS USE AN APPROVED HELMET AND PROTECTIVE GEAR

NEVER USE ON PUBLIC ROADS

NEVER CARRY PASSENGERS

NEVER USE WITH DRUGS OR ALCOHOL

NEVER operate:

- without proper training or instruction
- at speeds too fast for your skills or the conditions
- on public roads-a collision can occur with another vehicle
- with a passenger-passengers affect balance and steering and increase risk of losing control

ALWAYS:

- use proper riding techniques to avoid vehicle overturns on hills and rough terrain and in turns
- avoid paved surfaces-pavement may seriously affect handling and control

LOCATE AND READ OWNER'S MANUAL. FOLLOW ALL INSTRUCTIONS AND WARNINGS.



Warning

Inaccurate tyre pressure or overloading will lead to the motorcycle out of control.
Out of control will lead to serious injury or death.
The tyre pressure of cold state:
Front: 60kpa±5kpa
Rear: 60kpa±5kpa
Max load weight: 60kg



Warning



Never ride as a passenger.
Passengers can cause a loss of control, resulting in SEVERE INJURY or DEATH.



Warning



Operation of this ATV by children under the age of 13, increases the risk of severe injury or death.
Adult supervision required for children under age 16.
NEVER permit children under age 10 to operate this ATV.

CONTROLS

LEFT HANDLEBAR



Engine stop switch

“” position

The ignition is off, the engine can not start or run

“” position

The ignition circuit is on the 9

Rear brake lever

Apply the rear brake by squeezing the rear brake lever towards the grip.

Parking brake knob

This knob is used to set the parking brake which is used to prevent the ATV from moving when it is parked, being started or at idle. Set the parking brake by squeezing the rear brake lever and pushing the knob to lock the lever in the squeezed position.

Engine start switch

Depress the button with the parking braking engaged to start the engine. Right handlebar

Throttle lever

Engine speed is controlled by the throttle lever. Push it forward to increase engine speed. Release it to decrease engine speed. This lever is operated by the rider's thumb.

CHOKE LEVER

When this lever is in the down position, a rich mixture is supplied by the carburetor for starting the engine when it is cold. The lever is in the up position, the mixture supplied by the carburetor is optimum for starting a warm engine, and for normal operation.



EQUIPMENT AND ADJUSTMENTS

FUEL TANK CAP



To open the fuel tank cap, remove the end of the vent tube from the hole in the vehicle body and turn the fuel tank cap counterclockwise. To close the fuel tank cap, turn it clockwise and tighten it securely. Be sure that the end of the vent tube is re-installed in the hole in the vehicle body and routed properly as shown.

WARNING

Do not over fill the fuel tank. Stop adding fuel when the fuel level reaches the bottom of the filter neck as shown in the illustration. If you fill the tank beyond this level, fuel may overflow when it expands due to engine heat or by the sun.



Gasoline is extremely flammable and toxic. Always observe the following precautions when refueling your ATV.

- *never permit vehicle refueling by anyone other than an adult
- *Refuel in a well ventilated area.
- *Make sure the engine is off and avoid spilling fuel on a hot engine.
- *Do not smoke and make sure that there are no open flames or sparks in the area.
- *Avoid prolonged contact with skin and breathing of gasoline vapors.

REMOTE ENGINE STOP SWITCH(This is a custom device that may not be available on your ATV)

The ATV comes equipped with remote engine stop switch which may be operated by pulling the leash like lanyard attached to the stop switch cap. An adult supervising operation of the vehicle can use the lanyard to stop the engine from a short distance. The adult who trains the young rider should always use this lanyard until the rider develops sufficient skill for safe operation of the vehicle.

This switch consists of a rubber cap fitted over a plastic body. When the rubber cap is in place, the engine can operate. When the rubber cap is removed from the switch body, the engine cannot be started. If the engine is running and the rubber cap is removed by pulling the lanyard attached to the cap, the engine will stop running.

To use the remote engine stop switch:

Fit the rubber cap of the lanyard over the stop switch body located on the rear end of the vehicle as shown.

Put your fingers through the loop at the other end of the lanyard.

With the lanyard fastened to the vehicle and to your hand, follow after the moving vehicle. If you notice any driving hazard or unsafe situation, pull the lanyard forcefully so that the rubber cap comes off. This will activate the remote engine stop switch stopping the vehicle's engine.

WARNING

When the stop switch cap is pulled off, the engine will stop running. The vehicle will continue to roll for some distance, however remember this when judging when to operate the remote engine stop switch.

WARNING

If you do not put your fingers through the loop in the lanyard, it may slip from your grasp unexpectedly. This could make it impossible for you to stop the engine in an unsafe situation.

WARNING

The throttle limiter should always be set to the lowest power position when the engine stop lanyard is being used to train children. With enough skill for safe operation of the ATV without parental use of the lanyard should be permitted to operate ATV with the throttle limiter set to maximum power position. In addition, an adult trying to follow a moving ATV with the throttle limiter set to maximum position may run in into the rider if he stops, or may trip and fall down trying to keep up with the vehicle.

Instruction for engine stop switch lanyard storage

The lanyard may be stowed on the ATV when in judgment of the parent, the rider has developed sufficient skills to be able to safely operate the vehicle without parental use of the lanyard.

WARNING

To prevent unauthorized starting or unsupervised operation of the ATV, remove the stop switch cap and lanyard after each use and store them in a safe place, out of the reach of children.

BREAK-IN (RUNNING-IN)

The first 1 month is the most important in the life of your vehicle. Proper operation during this break-in period will help ensure maximum life and performance from your new vehicle. The following guidelines explain proper break in procedures.

MAXIMUM THROTTLE OPENING RECOMMENDATION

During the first 10 hours of vehicle operation, the maximum throttle opening you should use is 1/2 throttle.

VARY THE ENGINE SPEED

The engine speed should be varied during the break-in period. This allows the parts to be “loaded”(aiding the mating process) and then “unloaded”(allowing parts to cool). Although

it is essential that some stress be placed on the engine components during break-in, you must be careful not to excessively load the engine.

AVOID CONSTANT LOW SPEED

Operating the engine at constant low speed (light load) can cause parts to glaze and not seat properly. Allow the engine to accelerate freely through the gears, without exceeding the maximum recommended throttle opening.

OBSERVE YOUR INITIAL AND MOST CRITICAL SERVICE

The initial service (break-in maintenance) is the most important service your vehicle will receive. During break-in operation, all of the engine components will have mated together and seated. Maintenance required as part of the initial service includes correction of all adjustments, tightening of all fasteners and replacement of dirty oil.

Timely performance of this service will ensure optimum service life and performance.

INSPECTION BEFORE RIDING



Failure to perform an inspection before riding may result in an accident or serious damage to the vehicle. Check these items before each ride. Be sure your ATV is in good condition for the personal safety of the rider and protection of the vehicle.



All of the items should be checked with the engine off, except the functional check of the engine stop switch. Make sure your child doesn't get too close when you check the fuel level and drive chain, or he/she might be injured.

What to check	Check for
Steering	No rattle or looseness
Brakes	Proper lever play No" sponginess" Parking brake effectiveness
Tires	Proper pressure Enough tread depth No cracks rips or other damage
Fuel	Enough fuel for the intended run Fuel hose connected securely No damage to fuel tank or cap Tank cap closed securely
Engine stop switch	Proper operation

Engine oil	Proper level
Throttle	Proper cable play Smooth response Quick return to idle position
Drive chain	Adequate lubrication
General condition	Bolts and nuts are tight
	No rattle from any part of the machine with the engine running No visible damage
Remote engine stop switch(if used)	Proper operation No damage to rubber cap Secure attachment of lanyard to cap

Finish reading this “Riding Tips” section and then “Instructing a Young Rider” section before starting the ATV or beginning riding instruction. This “riding Tips” section contains important operating information you will need to know before you go to the “Instructing the Young Rider” section will guide you in teaching young riders how to operate and ride the ATV using information you learn in this owner’s manual.

STARTING THE ENGINE

Before attempting to start the engine, make sure:

- 1.The parking brake is engaged
- 2.The engine stop switch is in the “” position
- 3.Verify that the remote engine stop switch cap is in place(The ATV without this device can be ignored)

When the engine is cold:

1. Push down the choke lever as far as it will go



- 2.Make sure that the choke lever can return smoothly to the off position before starting the engine.

- 3.With throttle closed, start the engine by pressing the engine start button.

- 4.Return the choke lever all the way back to its disengaged position.

When the engine warm:

Operation of the choke system should not be necessary. Open the throttle slightly and start the engine by pressing the start button.



Release the throttle immediately after the engine has started.

WARNING

1. Do not run the engine indoors or where there is little or no ventilation. Exhaust gases contain carbon monoxide, a potentially lethal gas that is colorless and odorless.
2. Never leave the vehicle running while unattended, even for a short time.

STARTING OFF

After the engine has warmed up, disengage the parking brake. To release the parking brake. Simply squeeze the brake lever until the lock knob disengages.

WARNING

Before releasing the parking brake, make sure:

1. The choke lever has been returned to the fully OFF position.
2. The choke lever is fully closed.
3. The rider is completely ready to ride.

If you do not observe these precautions, the vehicle can move forward unexpectedly when the parking brake is released. This may result in an accident and injury.

WARNING

While operating the ATV, the rider should keep both feet on the footrests all times, or injuries resulting from accidents such as the rear wheels running over the rider's feet could occur. There is no need for the rider to move his/her feet from the footrests during operation or maneuvering of the vehicle. Moving the rider's feet from the footrests reduces the rider's ability to control the vehicle, and could lead to an accident.

WARNING

Keep both hands on the hand grips at all times when riding, removing your hands from the hand grips reduces your ability to control the vehicle, and could result in an accident.

BRAKING

To stop the ATV release the throttle lever and apply the brake.

WARNING

1. Avoid braking during turns. Use of the brake when turning could cause the ATV to slide or roll over. Use the brake to slow down before entering the turn.
2. Apply the brake lightly and with great care on slippery surfaces to avoid skidding.

WARNING

Never apply the parking brake lock when the ATV is moving. Rear wheels will lock, and an accident could result with injury.

TURNING

To turn the ATV, the rider must learn a special technique, because the vehicle has a solid rear axle, both rear wheels always turn at the same speed. This means that if the rear wheels are getting equal traction, the vehicle will move straight ahead, because the rear wheels will travel the same distance. For the vehicle to turn, the outside rear wheel must travel a greater distance than the inside rear wheel. To make this happen, the rider must learn how to create less traction for inside wheel, so that it can travel a shorter distance than the outside wheel, even though both wheels turn at the same speed.

To turn the ATV the rider should use the following technique:

1. Turn the handlebars in the direction of the turn.
2. Shift body weight slightly forward and support your weight on the outer footrest. This will reduce the load on the inside rear wheel, reducing its traction.
3. Lean upper body into turn.

TURNING AT HIGHER SPEEDS

Use the same technique that you use for turning at low speeds, but lean farther into the turn. Since natural turning forces (which tend to push the vehicle to the outside of the turn) increase as speed increases, you must lean your upper body farther into the turn as you go faster to the outside of the turn. Remember though to keep your weight supported on the outer footrest.



If the rider does not use the proper technique to turn the ATV, it may plow straight ahead even though the front wheels are turned.

The rider should practice the above technique at low speeds in a wide open area until he/she has mastered it.

SKIDDING OR SLIDING

If the rider experiences inadvertent skidding or sliding when not braking, he/she may be able to overcome it by using the appropriate technique listed below.

Front wheel:

If front wheel skidding occurs, try to gain front wheel traction by reducing the throttle opening and leaning your body weight slightly forward.

Rear wheel:

If rear wheel skidding occurs, steer in the direction of the skid (if space permits), shift body away from the skid slightly, and avoid using the throttle or brakes until you regain directional control of the vehicle.

WARNING

Skidding or sliding can result in an accident caused by loss of rider control. To avoid inadvertent skidding or sliding, the rider should slow down and be cautious when riding on slippery or loose surfaces.

OPERATION ON HILLS

Riders who have become experienced at operating the ATV on level surfaces may wish to try riding on a wider variety of terrains. The ATV may be operated on a small hill with even surfaces but extreme care should be taken.

WARNING

When the ATV is operated on hills, it can roll over more easily than when it is operated on level ground, under certain conditions, only children who are capable of safe operation of the ATV on level ground should be permitted to operate the vehicle on hills.

Climbing a hill

To climb a small hill with the ATV the rider should:

1. Speed up and maintain a steady speed before reaching the bottom of the hill.
2. Shift body weight forward by sliding forward in the seat, lean lightly forward.
3. Maintain a steady speed while climbing the hill.
4. Slow down when reaching the top of the hill.

WARNING

Only permit your child to climb small hills. Do not let him/her attempt to climb a hill unless you are sure that he/she can easily ride to the top of the hill without stopping. It can be dangerous to stop the ATV while climbing a hill, because the vehicle may begin to roll backwards and then roll over backwards.

The rider should never open the throttle suddenly when climbing a hill, the vehicle could flip over backwards.

The rider should never go over the top of the hill at high speed. Once over the top of the hill, he/she could lose control and crash or could collide with an unseen object.

If your child is climbing a hill and loses forward momentum, he/she could:

1. Lean farther forward.
2. Apply the rear brake and stop the vehicle before it starts to roll backwards.
3. Set the parking brake and dismount to the right while still leaning uphill.
4. Use one of the following procedures to turn the vehicle around.
 - 1) Ask the adult who is supervising to help drag the rear end of the ATV around until the vehicle is angled downhill. Stay on the uphill side of the vehicle while dragging it around.

2) Turn the handlebars fully to the right while standing on the uphill side of the vehicle release the parking brake and pump the handbrake to let the ATV roll slowly backwards. This will turn the vehicle sideways to the hill. Reset the parking brake. Turn the handlebars to the left. Staying on the uphill side, release the parking brake and pump the handbrake to let the ATV roll until it is angled downhill. Reset the parking brake.

Descending a hill

To ride down a small hill with the ATV, the rider should:

1. Point the ATV straight downhill.
2. Transfer body weight to the rear by sliding back on the seat.
3. Ride down the hill with the throttle closed Apply the brake to control downhill speed.

Traversing a slope



Traversing a slope is very tricky and should be avoided when possible, improper riding techniques while traversing a slope could cause the ATV to tip over. Do not permit your child to traverse a slope unless you are sure he/she can perform this maneuver safely.

To traverse a slope, the rider should:

1. Lean his/her body uphill.
2. Steer slightly uphill, if necessary, to maintain a straight course.

RIDING THROUGH WATER

The ATV may be ridden through water, provided that it not more than 15cm (6inches) deep and is not moving fast. When crossing a stream, choose a spot where the banks are gently sloped on both sides and the bottom of the stream is hard. If you are unfamiliar with the area you wish to cross, park the ATV and inspect the stream first, to find a suitable spot for crossing. When crossing, operate the vehicle at a slow, steady speed.



1. Do not attempt to cross a stream with deep or fast flowing water. The tires may lose their traction, and you may be unable to control the vehicle. This could result in personal injury.
2. After riding through water, test the brakes to see if they have maintained their effectiveness. If they are less effective than normal then dry them by repeatedly applying the front and rear while riding slowly until the brakes have regained their normal effectiveness.

Caution:

After extended operation of the ATV in water, bring it to your authorized dealer to have the brakes inspected and cleaned, if necessary. Failure to take this precaution can result in excessive brake wear.

STOPPING THE ENGINE

Release the throttle lever. Turn the engine stop switch to the “” position.



PARKING THE VEHICLE

Set the parking brake securely as explained in the “STARTING THE ENGINE” section.

It takes some time for the engine and muffler to cool off after a long ride. Do not touch these parts until they have had time to cool off, or you may burn yourself.

INSTRUCTING YOUNG RIDERS

IMPORTANT ADVICE TO THE PARENT:

Your child’s safety depends on your commitment to take the time necessary to fully educate him/her on the proper operation of the ATV. Remember that proper instruction before your child begins

to ride is just as important as proper instruction and supervision while riding.

Please go through this manual with your child, page by page and fully explain all of the instructions, requirements and warnings it contains. Be sure to put as much emphasis on safety precautions as on proper operational techniques. Question your child as you go through the manual to make sure he/she understands what you are saying.

The following is a step by step guide to help your child’s first use of the ATV be a safe and enjoyable experience. Before you begin to use this guide, however, be sure you have reviewed the vehicle features and riding techniques described in earlier parts of this owner’s manual. Our company strongly urges that you use this guide to teach children that you let ride the ATV.

Be sure to take breaks as the child being instructed gets tired or his/her attention begins to wander. Full attention at all times is needed to safely operate any motorized vehicle, including the ATV.

PROPER CLOTHING AND PROTECTIVE WEAR

The first step to safe riding is proper protection of the rider, your child should always wear a helmet, eye protection, gloves, long pants, a long sleeved shirt or jacket and boots. Make sure that your child is not wearing any loose fitting clothes, loose belts, scarves, etc. that can get caught in moving parts and cause personal injury. Even in hot weather, make sure the child wears long pants and a long sleeved shirt. These not only protect against abrasive injuries, but also help to reduce fatigue which comes from loss of body heat due to the wind.



Failure to wear proper clothing and protective wear, as described above, may result in

severe personal injury.

FAMILIARIZATION WITH THE VEHICLE

Your child should become completely familiar with the names and functions of all controls. Let the young rider sit on the ATV with the engine off, and ask him/her to operate specific controls. Demonstrate operation of the controls if necessary. Ask the child to do such things as 'apply the brakes, turn off the engine, lock the parking brake' etc. Practice this exercise until the child can operate all of the controls without hesitation and without looking at the controls.

Go over the INSPECTION BEFORE RIDING with your child until he/she knows all of the items that should be checked and how they should be checked. Give specific examples of things to look for.

STARTING OFF AND STOPPING



For practice, choose a large, level area away from other riders and free of obstructions. Inspect the area before riders and remove any rocks, sticks or other potential hazards. Stay away from ditches and bumps.

To help your child develop confidence, he/she should PRACTICE FIRST WITH THE ENGINE OFF, as follows:

1. Have your child sit on the ATV and tell him/her to release the parking brake.
2. Instruct your child to keep his/her eyes straight ahead and slowly push the vehicle from behind if you are physically able to do so. This will allow your child to get the feel of riding a moving vehicle.
3. As you push the ATV instruct your child to steer straight ahead and perform operations such as stopping the vehicle and turning off the engine stop switch while moving, watch your child closely to make sure he/she is operating the controls correctly and without looking at the controls.
4. As you approach the end of the practice area, tell the rider to stop the vehicle, apply the parking brake and get off. You should then drag the rear end of the ATV around so you can push it straight ahead in the opposite direction.



Before permitting your child to operate the ATV under power, be sure to adjust the throttle limiter to provide a low maximum speed capability. Turning the limiter clockwise reduces the ATV's maximum speed capability.

Next start the ATV's engine and have your child practice starting off riding in straight line, and stopping with the vehicle under power. Walk along side the ATV if you can, or have the

youngster ride back and forth between you and another supervisor. Watch closely to make sure the rider:

1. Opens the throttle gently when starting off.
2. Releases the throttle and applies the brake in sequence when stopping.
3. Becomes aware of the distance it takes the vehicle to stop when the engine stop switch is turned off while the vehicle is moving.

As you approach the end of the practice area, you should again tell the rider to stop the vehicle, apply the parking brake, and get off so you can turn it around for him/her. Practice this exercise until your child can start off, accelerate, cruise, and stop correctly and with confidence.

TURNING

After your child has learned to ride the ATV in straight line and can stop it when he/she wants to, you should teach the child how to

turn the vehicle. Explain the proper body movements for turning, and let your child **PRACTICE FIRST WITH THE ENGINE OFF**, as you push the vehicle from behind. When turning, watch to make sure your child:

1. Shift his/her weight slightly forward and supports his/her weight on the outer footrest.
2. Leans his/her upper body into the turn and turns the handlebar in the direction of the turn.

When the rider is able to properly turn the ATV in both directions with the engine off, he/she should practice with the vehicle under power. Again, make sure that the throttle limiter is adjusted to provide a low maximum speed capability. Watch closely to make sure the rider is using the proper turning technique. The rider should practice turning until he/she can do it correctly and with confidence.

PUTTING IT ALL TOGETHER

When your child has mastered the basic riding maneuvers in the previous steps, he/she should practice putting them all together, instruct the rider to perform various maneuvers such as turning right, turning left, stopping, parking, etc. Mix up the order of these maneuvers so the child will not know what he/she will be asked to do next. Practice this exercise until you are confident that the rider has mastered all the basic maneuvers.

The above steps will help the first time rider learn the most basic riding techniques. To become a skilled rider, your child will need a great deal of practice and instruction after these steps have been completed. Be patient with your child: take extra time when teaching him/her additional techniques such as the recommended techniques for climbing

and descending hills.

After your child has mastered the basic riding or all techniques at slow speeds, you can adjust the throttle limiter to provide higher speed capabilities according to the riders skill and experience.

INSPECTION AND MAINTENANCE

MAINTENANCE SCHEDULE

It is very important to inspect and maintain your ATV regularly. Follow the chart below, the chart indicates the intervals between periodic services in months. At the end of each interval, be sure to inspect, adjust, lubricate, replace and service as indicated.

 WARNING

Our company recommends that maintenance on the items, in the chart below which are marked with an asterisk (*) be performed by your authorized dealer or a qualified service mechanic if you are qualified, you may perform maintenance on the unmarked items by referring to the instructions in this section. If you are not sure whether you can successfully complete the maintenance jobs, ask your authorized dealer to do the maintenance for you.

 WARNING

Do not attempt to perform maintenance on this vehicle if you are not qualified. You could be injured or damage the machine.

 WARNING

The safety of the rider depends on how well this machine is maintained. Follow all inspection and maintenance instructions carefully.

 WARNING

Don't let your children tinker with this machine. They may get hurt. Maintenance should only be performed by qualified adults. Make sure that the engine stop switch is in the 'A' position unless the engine must be running to perform the required maintenance.

CAUTION:

The maintenance intervals shown in the chart below are based on average riding conditions. If the ATV is ridden in a dusty area, the air cleaner and drive chain should be serviced more frequently if the vehicle is operated under these extreme conditions. If you have any questions regarding appropriate maintenance intervals, consult your authorized dealer.

PERIODIC MAINTENANCE CHART


NOTE: inspect and clean, adjust, lubricate, or replace, if necessary.

Item Interval	After 1 month	Every 3 months	Every 6 months
Air cleaner elements	Clean at least every month		
Spark plug		C	R
Cylinder head and exhaust parts	Tighten cylinder head nuts	Every 3 month	Remove carbon
Carburetor	Adjust throttle valve stop screw and pilot screw	Every 3 month	Adjust throttle valve stop screw and pilot screw
Fuel line	Replace every 4 years		
Engine oil	R		R
Drive chain	Inspect every month		
sprockets	Inspect every month		
Tires	Inspect every month		
brakes	Inspect every month		
Steering	Inspect every month		
Chassis nuts and bolts	T	T	
General lubrication		L	

SEAT REMOVAL

Remove the seat by pulling the seat lock lever upward and lift the seat at the rear. Insert the projection on the front of the seat into the holder and push down on the seat at the rear to install the seat.

according to the following chart.

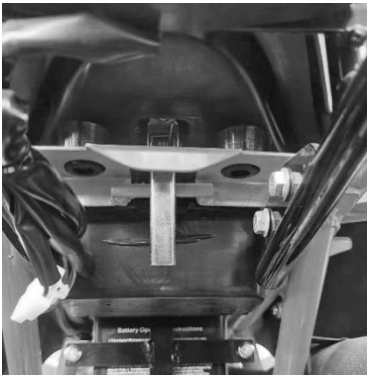

CAUTION:

An improper spark plug may have an incorrect fit or heat range for your engine, this may cause severe engine damage which may not be covered under warranty. Use one of the spark plugs listed below or equivalent. Consult your dealer if you are not sure which spark plug is correct for your type of vehicle usage.

To install a spark plug, turn it in as far as possible with your fingers, and then tighten it with a wrench. Do not over tighten or cross thread the spark plug, or the aluminum thread of the cylinder head will be damaged. Do not allow contaminants to enter the engine through the spark plug hole when the plug is removed.

CAUTION:

Always make sure the seat is securely fitted.

AIR CLEANER

If the air cleaner element is clogged with dust, there will be greater intake resistance, resulting in decreased power output and increased fuel consumption.

CAUTION:

1. Do not operate the engine without the air cleaner element in place or severe damage may result.

2. If you usually ride in dusty areas or regularly operate the vehicle wet, muddy conditions, you

must inspect the air cleaner element more frequently than shown in the periodic maintenance

chart. If at any time, the air cleaner element is submerged in water, immediately clean the element and the inside of the air cleaner case.

SPARK PLUG

Your ATV comes equipped with an AT7C OR A7RTC (NGK C7HSA) spark plug. You can determine if

the standard spark plug is suitable for your type of vehicle usage by observing the color of the

plug's porcelain center electrode insulator after vehicle operation. If the plug has the correct heat range, it should be very light brown in color. If the plug tends to run too cold, (usually evidenced by blackening of the insulator or


a wet electrode) replace it with an alternate plug according to the following chart.

CAUTION:

An improper spark plug may have an incorrect fit or heat range for your engine, this may cause severe engine damage which may not be covered under warranty. Use one of the spark plugs listed below or equivalent. Consult your dealer if you are not sure which spark plug is correct for your type of vehicle usage.

WARNING


To install a spark plug, turn it in as far as possible with your fingers, and then tighten it with a wrench. Do not over tighten or cross thread the spark plug, or the aluminum thread of the cylinder head will be damaged. Do not allow contaminants to enter the engine through the spark plug hole when the plug is removed.

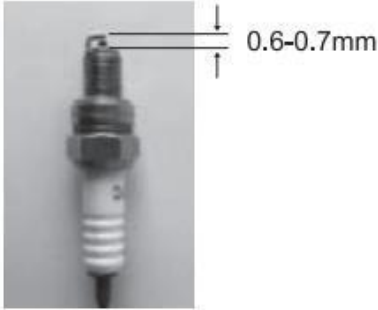

To maintain a hot, strong spark, keep the plug free of carbon. Remove carbon from the plug with a wire brush and adjust the gap to 0.6-0.7mm for good ignition. Use a thickness gauge to check the gap.

IDLE SPEED ADJUSTMENT

There are bolts on the right side of the carburetor to adjust idle speed. The engine idle speed is low when rotating counterclockwise, and high when rotating clockwise. The appropriate engine idle speed is 1500 ± 100 r/min, when the engine idle speed exceeds 1500 ± 100 r/min, it should be adjusted in time; An engine idle too low or too high can seriously damage the engine and may result in serious injury or death.

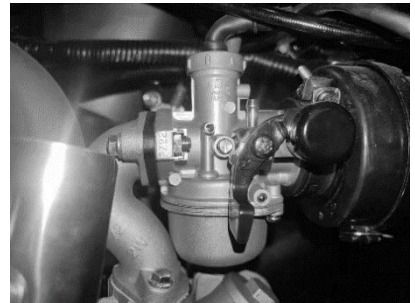

THROTTLE CABLE ADJUSTMENT

Measure the throttle cable play by pressing the throttle lever. The throttle lever should have 20-25mm play. To adjust the throttle cable play.

1. Loosen the lock nut
2. Turn the adjuster in or out to obtain the correct play
3. Tighten the lock nut
4. Recheck the throttle cable play. Readjust it if it is not within the correct limits.



FUEL HOSE

Replace the fuel hoses every 4 years, even if it appears to be in good condition. Damage from aging may not be visible.

ENGINE OIL

The transmission oil should always be changed when the engine is hot so that the oil's viscosity will be low and the oil will drain completely from the engine.

To change the oil:

- 1.Place the vehicle on level ground
- 2.Remove the oil filler cap
- 3.Remove the oil drain plug from the bottom of the engine and drain the oil completely
- 4.Re-install the drain plug
- 5.Remove the oil level screw and pour fresh oil of the specified type through the filler hole until the oil flows out from the oil level hole.

Note: Approximately 900ml of oil is required.

CAUTION:

Frequent use in wet conditions will require more frequent oil changes. If the vehicle becomes submerged in water, immediately change the oil. Failure to follow this instruction may result in severe transmission damage.

BRAKE

The ATV has a rear disk brake



Failure to properly inspect and maintain your ATV's brake systems can be hazardous. Improper maintenance of the brakes increases your chances of having an accident.

Be sure to inspect the brakes before each use of the vehicle according to the inspection before riding section. Always maintain your brakes according to the Maintenance Schedule.



Operating the ATV in harsh conditions can be hazardous if you do not inspect brake wear often. Operating in mud, water, sand, or other extreme conditions can cause accelerated brake wear. This could lead to an accident. If you operate your vehicle under these conditions the brakes must be inspected more often than recommended in the Maintenance Schedule.

Brake Adjustment

To increase brake function, making the vehicle brake more steady.

- 1.Set the parking brake by squeezing the brake lever and pressing the lock knob.
 - 2.Try to move the vehicle backward and forward to see if the rear wheels are securely locked.
- If the rear wheels can turn, adjust the brake to lock the wheels securely by releasing the

parking Brake.

3.If it doesn't lock, check it:

a. Brake fluid

The brake fluid level must be kept between the upper and lower mark. The brake pads must be checked to see if it is damaged or at the limit depth, then there may be leakage in the brake master cylinder. You should turn to the after-sale service station for inquiry. If brake fluid is OK, bleed air from the system, open the bleeder, then lock the nut.

b. Brake pads

During the maintenance period, the pads can be examined by eye. Once either friction pad is worn to the limit depth, replace both pads at the same time. The tube and lining fitting must be examined to ensure that the brake fluid is not leaking.

Repeat this procedure until the parking brake is properly adjusted.

4.Measure the amount of free play needed to apply the brake lever. Adjust the brake, if necessary, so that amount of free play is about 5mm (0.2in)

5.After any adjustment of the brake, check it again to make sure the rear wheels can not turn when the parking brake lock knob is engaged.

TIRES



Using tires of a different size or type than the tires originally equipped on your ATV can change

the ATV's handling characteristics. Different handling characteristics can result from differences

in carcass construction, sidewall strength, thread pattern, etc.



For the rider's safety, check your vehicle's tires before each use of the vehicle, to make sure they have proper pressure, enough thread depth, and no damage.



Operating the vehicle with excessively worn tires can cause skidding due to decreased traction.

It is recommended that the front and rear tires be replaced when the depth of the tire thread is

4mm (0.16in) or less.

Tire pressures

A low pressure gauge is provided in the tool kit under the seat, so you can measure the air

pressure in your ATV tires. Check the air pressure in all tires before each use of the vehicle. Improper air pressure can affect handling, maneuverability, traction, tire life and rider comfort.

Be sure that the tires are inflated to the pressure shown below. Tire pressure should only be measured or adjusted when the tires are cold, or misleading measurements can result.

Caution:

Using a high pressure air pump to fill the tires can be hazardous. If too much air is put into a tire, the tire may burst, causing severe injury. Use a manual type air pump to fill the tires.

Tire replacement

Air in the low-pressure tubeless tires of this vehicle is sealed by the contact surfaces of the inner

wheel rim and tire bead. If either the inner wheel rim or tire bead is damaged, air may leak. Be

extremely careful not to damage these sections when replacing tires.

When breaking the tire bead loose from the wheel. Be extremely careful not to damage the inner surface or the tire bead.



The ATVs tires are intended to rotate in a specific direction, as indicated by the arrows on the sidewall of each tire. Be sure to install tires so they rotate in the proper direction or you may experience poor handling.

It is very important to use the proper tools when repairing or replacing tires, to prevent damage to the tire bead or wheel rims. We highly recommend that you have work done by your dealer or qualified tire repair station.

Tubeless tire repair

Should a leak or flat tire occur due to a puncture, the tire may be repaired using a "Plug" type patch. If the damage is from a cut, or if the puncture cannot be repaired using a plug, the tire should be replaced. When operating your ATV in areas where transportation or service facilities are not readily available, it is strongly recommended that you bring a plug type repair kit and a tire pump with you.

DRIVE CHAIN

The condition and adjustment of the drive chain should be checked once a month. Always follow the guidelines below for inspection and servicing the chain. You should periodically inspect the drive chain for the following:

Loose pins

Damaged rollers
Dry or rusted links
Kinked or binding links
Excessive wear

If you find anything wrong with the drive chain condition or adjustment, there is a strong possibility that the sprockets will have

damage to them also. Inspect the sprockets for the following:

Excessively worn teeth

Broken or damaged teeth

Drive chain cleaning and oiling

Clean and oil the chain as follows: Drive chain cleaning and oiling


Clean and oil the chain as follows:

1. Wash the chain using a chain cleaner designed for o-ring type chains.

Once clean, lubricate the chain with a motorcycle chain lube.



DO NOT use gasoline or other solvents to clean the chain as it may cause the o-rings to swell.



Caution:

Do not use gasoline, trichlene, or other commercial cleaning solvents to clean the drive chain.

These fluids have a strong dissolving power that could damage the "O" rings in the chain. Damage to the "O" rings would allow the grease to run out of the chain and the chain would have to be replaced.

2. After thoroughly washing the chain and allowing it to dry, oil the links with a motorcycle drive chain lubricant.

Caution:

Some lubricants which are sold as drive chain lubricant can damage the "O" rings of your vehicle's chain. So only use recommended motor oil or a lubricant that is especially intended for use on "O" ring chains.



Failure to inspect the drive chain slack before each use of the ATV could be hazardous. Too much chain slack could cause the chain to come off the sprockets, resulting in an accident or serious damage to the ATV.

Inspect the drive chain slack before each use.

FRONT AND REAR WHEEL REMOVAL



1. Place the vehicle on level ground and set the parking brake.
2. Loosen the three wheel nuts on the wheel to be removed.
3. Lift up the front or rear end of the vehicle by placing a jack or block under the axle or frame.
4. Remove the four wheel nuts.
5. Remove the wheel. To reinstall the wheel, reverse these steps.

WARNING

When replacing a wheel, it is very important that the wheel nuts be torqued to the proper specifications. If they are not, the wheel can come off unexpectedly. We strongly recommends that you have these nuts checked and torqued, if necessary, by your authorized dealer.

General Lubrication

Proper lubrication is important for safe & smooth operation and long life of each working part of your vehicle. Pay attention to the need for lubrication when you perform periodic maintenance on the vehicle.

Be sure to have your authorized dealer perform general lubrication as shown in the maintenance chart on page 24. Your authorized dealer will lubricate such items as wheels, bearings, rear axle housing, steering shaft holder, etc.

TROUBLE SHOOTING

Caution:

It is best to consult your dealer before attempting to troubleshoot any problem. Damage may result from inappropriate repairs or adjustments. Such damage may not be covered

under warranty. This troubleshooting guide is provided to help you identify the cause of some common complaints.

Problem: Engine is hard to start or does not start at all. Something is probably wrong with the fuel or ignition system.

Fuel system check

1. Make sure there is adequate fuel in the fuel tank.
2. Check that the engine stop switch is in the "O" position
3. Check that the remote engine stop switch cap is installed on the remote engine stop switch(The ATV without this device can be ignored).
4. Make sure there is enough fuel reaching the carburetor from the fuel tank
 - a. Loosen the drain screw which is located under the carburetor and drain the fuel from the carburetor.

WARNING

Do not allow the fuel to spill. Catch the fuel in a container. Do not allow any fuel to come in contact with the hot engine or exhaust system. Extinguish any smoking materials before performing this check, and stay away from any open flames or heat sources.

- b. Tighten the drain screw
- c. Grip the brake handle and press the start button.
- d. Loosen the drain screw and check that the carburetor is filled back up with fuel.
- e. If it has been determined that fuel is reaching the carburetor, the ignition system should be checked next.

Ignition system check

1. Remove the spark plug and reattach it to the spark plug lead.
2. While holding the spark plug firmly against the engine, push the starter button with the engine stop switch cap is installed on the remote engine stop switch. If the ignition system is operating properly, a blue spark should jump across the spark plug gap.

WARNING

Do not check for a spark unless you are certain that you know how to do it, you could get a high voltage electrical shock. When testing for a spark, do not point the spark plug near the spark plug hole. There may be some fuel inside the cylinder which could be ignited. Due to the possibility of electrical shock, anyone with a heart condition or pacemaker should avoid this check.

PROBLEM: Engine stalls

1. Make sure there is enough fuel in the fuel tank
2. Check to see that the spark plug is not fouled. Remove the plug and decarbon or replace it, if necessary.
3. Make sure the fuel valve is clear. Also check that the air vent hose connected to the fuel tank cap is not clogged.

TRANSPORTATION

The ATV should be transported in the normal position if possible. It may also be transported in

the standing position, but the standing position is not as stable as the normal position.

Before transporting the ATV, drain the fuel from the carburetor as follows:

1. Turn the fuel valve lever to the ON position.
2. Drain fuel from the carburetor into a suitable container by loosening the carburetor drain bolt.
3. When the fuel has drained completely, retighten the drain bolt.

WARNING

When draining the carburetor, always shut the engine off. Do not smoke, never drain, or refuel

in an area where there are open flames or sparks.

WARNING

Be sure to use a suitable container to catch the fuel drained from the carburetor. Do not allow

the fuel to spill or you may create a fire hazard. Keep fuel out of the reach of children and pets or they may be injured, and dispose of unwanted fuel properly.

WARNING

When transporting the ATV, lock the parking brake and tie down the vehicle securely with rope

or some other suitable means. Use extra tie downs when you transport the vehicle in the standing position. Failure to properly secure the vehicle may result in an accident or damage to the vehicle.

STARTING AFTER TRANSPORT

To feed fuel into the carburetor, turn the fuel valve to the PRI position.

CLEANING PROCEDURE

A thorough cleaning of your ATV is a necessary part of maintenance and will help keep

your ATV looking and performing its best. Proper cleaning can also extend the life of your ATV.

It is important to clean and inspect your ATV after every ride if its used in mud, brush, grass, water, salt water, or every dusty conditions.

The buildup of mud, brush grass, etc. especially on the engine and exhaust system can reduce engine cooling, conceal damage, or increase wear of certain parts. It is important to remove all debris during cleaning.

PREPARATION FOR CLEANING

Wash the ATV before any mud dries on the ATV.

Block or seal the end of the exhaust pipe using a piece of plastic wrap, cloth rag or another method to prevent water from entering the engine.

High pressure washers can damage your ATV.

Caution:

High pressure washers such as those found at coin-operated car washes have enough pressure to damage the parts of your ATV. It may cause rust, corrosion and increase wear.

Do

not sure high pressure washers to clean your ATV.

WASHING YOUR ATV

With some care, your ATV can be washed in a similar manner to washing an automobile.

Note: Avoid spraying or allowing water to flow over the following places:

Spark plug

Fuel tank cap

Carburetor

Snorkel air intake for air filter and carburetor (The snorkel air intake opening is located at the

highest point on the ATV, usually in front of the seat).

Use a garden hose at low pressure to remove the majority of dirt or other debris. Hand wash your ATV with a mild soap or detergent and water. Try to thoroughly remove all dirt and debris without excessive water pressure, even at remote areas such as between engine cooling fins, linkages or mounting brackets. Cloth rags, washing mitts or cleaning brushes can be used. Be careful with brushes as they may scratch plastic or painted surfaces. Rinse the ATV thoroughly with clean water. Dry all areas using a chamois or soft absorbent cloth.

INSPECTION AFTER CLEANING

Remove the rags or wrapping from the exhaust pipe. Check the drain tubes on the bottom of

the air filter box and drain any water than has collected in them. For extended life of your ATV,

lubricate according to GENERAL LUBRICATION section.

Operating ATV with wet brakes can be hazardous.

Wet brakes may not provide as much stopping power as dry brakes, this could lead to an accident.

Test your brakes after washing ATV, while riding at slow speed, if necessary, apply brakes several

times to let the friction dry out the linings.

Follow the procedures in the INSPECTION BEFORE RIDING section to check your ATV for any problems that may have arisen during your last ride.

STORAGE PROCEDURE

If your ATV is to be left unused for an extended period of time, it needs special servicing requiring appropriate materials, equipment and skill. For this reason, we recommend that you trust this maintenance work to your dealer. If you wish to service the machine for storage yourself, follow the general guidelines below:

VEHICLE

Place the vehicle on level ground and thoroughly clean the entire vehicle.

FUEL

Drain the fuel from the fuel tank using a commercially available hand pump or siphon. Drain the

fuel from the carburetor using the carburetor drain screw. Do not allow the fuel to spill; catch

the fuel in a suitable container. Do not allow fuel to come in contact with the hot engine or exhaust system. Extinguish smoking materials before draining any fuel and stay away from any

other fire or heat source. Keep pets and children away from fuel, and dispose of unwanted fuel

properly.

ENGINE

Pour one tablespoon of motor oil into the spark plug hole, re-install the spark plug and crank the engine a few times.

TIRES

Inflate the tires to the normal specification.

EXTERNAL

Spray all vinyl and rubber parts with a rubber preservative.

Spray unpainted surfaces with rust preventative.

Coat painted surfaces with car wax.

PROCEDURE FOR RETURNING TO SERVICE

Clean the entire vehicle.

Remove the spark plug. Turn the engine over a few times by pulling the pull start. Reinstall

the spark plug.

Make sure that the vehicle is properly lubricated.

Perform the INSPECTION BEFORE RIDING as listed in this manual.

SPECIFICATION

MODEL(S)	ATV002;FR125ATV-SP
ENGINE	125cc 1 cylinder 4 stroke
COMPRESSION	9.0:1
IGNITION	CDI
MAX POWER(KW/R/Min)	6.0/7500(1±5%)
Max torque(N .m/r/Min)	9.5/5500(1±5%)
Max Loading	75kg (165lbs.)
Transmission	Chain
Max Speed	50±5km/h
Fuel Tank	2.0L
Ground Clearance	120mm
L×W×H	1400×920×1000mm
Seat Height	710mm
Front Tire	19x7-8
Rear Tire	18x9.5-8
N.W/G.W.	110±1kg/130±2KG
Packing Size	1310x770x630

Circuit Diagram

125ATV schematic diagram

